



Effect of Growth Stage-based Water Stress on Yield and Water Use Efficiency of Tomatoes (*Solanum lycopersicon* L.) in Semi-arid Regions of Tigray, Ethiopia

Ekubay Tesfay Gebreigziabher ^{a*}

^a Department of Natural Resources Research, Shire-Maitsebri Agricultural Research Center, Shire, Tigray, Ethiopia.

Author's contribution

The sole author designed, analysed, interpreted and prepared the manuscript.

Article Information

DOI: <https://doi.org/10.9734/aprj/2024/v12i4261>

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/119376>

Original Research Article

Received: 22/04/2024

Accepted: 25/06/2024

Published: 08/07/2024

ABSTRACT

Water availability is a major concern in regions with limited water resources. Implementation of best irrigation water management methods can maximize crop yields and irrigation water use efficiency. An experiment was conducted in Laelay Koraro district, Tigray, Ethiopia for two consecutive years (2018 and 2019 off seasons) to investigate the effect of growth stage-based deficit irrigation on tomato yield, yield characteristics and water usage efficiency. The experiment used a randomized complete block design (RCBD) with three replications. The treatments were three irrigation levels (100%, 50%, and 25% of crop irrigation requirement) and four FAO-defined tomato growth stages

*Corresponding author: E-mail: ekubaytesfay2023@gmail.com;

(initial, developmental, mid, and late seasons). Data on agronomic parameters and irrigation water were collected and analyzed statistically. The results revealed that reducing irrigation amount by up to 75% during the development growth stage significantly decreased marketable yield by up to 66.5%. However, the highest water use efficiency (9.2kgm^{-3}) was achieved by reducing irrigation amount by 75% at the end-growth stage of tomato. Treatments with the lowest water use efficiency (3.5kgm^{-3}) were those receiving 75% less irrigation amount than the full requirement during the development growth stage. Irrigation deficit up to 75% of the full requirement during tomato development stages greatly affect marketable yield and water use efficiency. Therefore, the tomato crop is highly susceptible to water stress when receiving more than a 50% reduction in full irrigation requirement during its developmental growth stage.

Keywords: Growth Stages; marketable yield; tomato; water use efficiency.

1. INTRODUCTION

Sustainable use of water in agriculture is a key issue. Adopting techniques to conserve irrigation water and maintain adequate yields can help renew this ever-limited resource [1,2]. "In areas with persistent water scarcity and summer drought, maximizing water productivity can be more profitable for farmers than maximizing yield. The latest innovative technology for agricultural water conservation is deficit irrigation (DI). It is a water saving method where plants are exposed to positive levels of water stress during certain growth stages or during the whole growth stage" [3,4]. The expected yield discounts may be small compared to the benefits of saving water.

"The purpose of deficit irrigation is to increase crop water use efficiency (WUE) by reducing the amount of water used" [5,6,7]. "The deficit irrigation approach involves irrigating the soil with much less water than is needed for transpiration and using an appropriate irrigation schedule, which may generally be derived from subject experiments" [8,9,10]. "The crop's tolerance to water deficit during the growing season varies according to the phenological stage" [11]. "Optimal irrigation schedules are often determined based on water use efficiency. Deficit irrigation techniques have the ability to optimize water efficiency. However, the effect of insufficient irrigation on yield varies among different crops" [12-16]. Records of how unique plants cope with mild water stress provide ideas for successful control of irrigation water.

"Therefore, the knowledge of plant response to water stress is very important for the knowledge of management change, which is important for irrigation water conservation strategies in water stressed areas. Most of the horticultural production areas are located in hot and dry

climates due to favorable climatic conditions. But lack of soil moisture is common in these areas instead. In addition, water-saving irrigation strategies, including deficit-irrigation, may optimize water efficiency in those locations by stabilizing yield and improving crop quality" [12].

"Tomato (*Solanum lycopersicon L*) is one of the widely cultivated vegetable plants in Tigray, Ethiopia. The application of regulated deficit irrigation (DI) techniques to this crop may additionally considerably result in saving irrigation water" [12]. Study's findings confirmed contradictory effects at the adoption of deficit irrigation techniques for tomato plants. Some researchers stated that the application of deficit irrigation for the complete or partial developing season of tomatoes minimizes fruit losses and maintains excessive fruit count [17,1]. But [18] found a giant reduction in dry mass yield for a greenhouse tomato cultivar using deficit irrigation. On the other hand, [19] did not find a reduction within the tomato fruit yield of greenhouse-grown processing cultivars. Despite the fact that the effects of deficit irrigation (DI) on tomato fruit yield may be unique, many investigators have confirmed that deficit irrigation saves good quantities of irrigation water and increases water use efficiency (WUE). Therefore, the aim of this subject trial was to analyze the effect of growth stage-based regulated deficit irrigation on yield and irrigation water use efficiency in tomato.

2. MATERIALS AND METHODS

2.1 Description of the Experimental Site

The experiment was conducted in 2018 and 2019 at Selekleka Research Farm of Shire-Maitsebri Agricultural Research Center. The experimental site is located in the northern Tigray region of Ethiopia, approximately 38.72° east

longitude, 14.3° north latitude and 1307 meters above sea level. The long-term average maximum and minimum temperatures are 42.3 and 13.2 degrees Celsius respectively. The average annual monthly rainfall in the region is 340.5 mm and is characterized by a monomodal rainy season with a rainy season from June to mid-September. The soils of the site have good drainage, deep, light brown to dark brown in color, have a loamy and sandy texture, and are cultivated continuously. Field capacity, permanent wilting point and available water storage capacity per meter of soil profile in the root zone are 38.6, 29.8, and 145.28 mm, respectively.

2.2 Experimental Design and Treatment Set Up

The experiment employed randomized complete block design (RCBD) with three replicates. The two factors were FAO-defined tomato growing stages and irrigation application rates. Table 1 shows the treatments, which included three irrigation levels (100%, 50%, and 25% of crop evapotranspiration, ET_c) and four FAO-based tomato growth phases (initial, developmental, mid, and late/maturity). Each experimental plot was 9.6 m² and consisted of 5 furrows measuring 80 cm wide and 3 m long. The specified spacing of 30 cm between plants was followed. The distance between blocks and experimental plots was 2 and 1.5 meters, respectively. Irrigation water was given to each plot via a calibrated 2-inch partial flume based on the treatments. Each experimental treatment received an equal amount of the required fertilizer. The whole dose of DAP was applied at transplanting, whereas urea was applied in two parts, half during planting and the rest just 30 days after transplanting, depending on the size of the plots. All additional cultural techniques were applied uniformly to all plots in accordance with the crop's standard recommendations.

Full irrigation (100% ET_c) denotes the amount of irrigation water applied as estimated by the Penman Monteith method with the CROPWAT computer program, whereas 50% ET_c and 25% ET_c irrigation levels meant water stressing the test crop by 50% and 75% of the full amount required by the crop at some growth stage, respectively.

2.3 Test crop Characterization

The experimental crop for this study was an improved tomato variety (Melkasalsa-Variety)

which was cultivated in the study area for 120-125 days after transplanting. Based on FAO references Guidelines [20,21] and previous research findings in our research center from many field trials, the initial growth stage was set to 24 days from the transplanting date, 36 days from the end of the initial stage as the development stage, 40 days from the end of the development stage as the mid-stage of growth, and 24 days from the end of the mid-stage as the late-season stage of growth. The crop was sown during the off-seasons of December 9, 2018 and December 12, 2019. Tomato seedlings were transplanted into a plot size 3 meters by 3.2 meters. The plots within a block were spaced 1.5 m apart, and the blocks were separated by 2 m. According to the FAO irrigation and drainage report [22], a maximum root depth of 100cm, a crop coefficient of 1.15, and a permitted depletion level value of 0.35 were used to calculate water requirements and schedule irrigation.

2.4 Crop Water Requirement

In this study, the estimation of water requirements and irrigation scheduling has been based on the climatic, crop, and soil conditions of the experimental site. The FAO Penman-Monteith method [22] was used to define reference evapotranspiration and irrigation requirements with the help of a computer program called "CROPWAT version 8.0".

2.5 Data Collection

2.5.1 Climatic data

Before the start of the experiment, secondary data such as climatic data from 20 years on rainfall (R.F.), min and max temperature, relative humidity (RH), wind speed (WS), and sunshine hours (SH) were collected from the nearby meteorological station (Maitsebri Meteorological station). Irrigation efficiency for furrow irrigation, root depth of the tomato crop, tomato crop growth stages and their respective lengths of period, and soil infiltration rate data were also collected from previous records and FAO guidelines.

2.5.2 Soil data

Soil sampling was carried out at the experimental site to measure soil physical properties. Soil texture was determined using the pipette method [23,24] at 0–25, 25–50, 50–75, and 75–100 cm

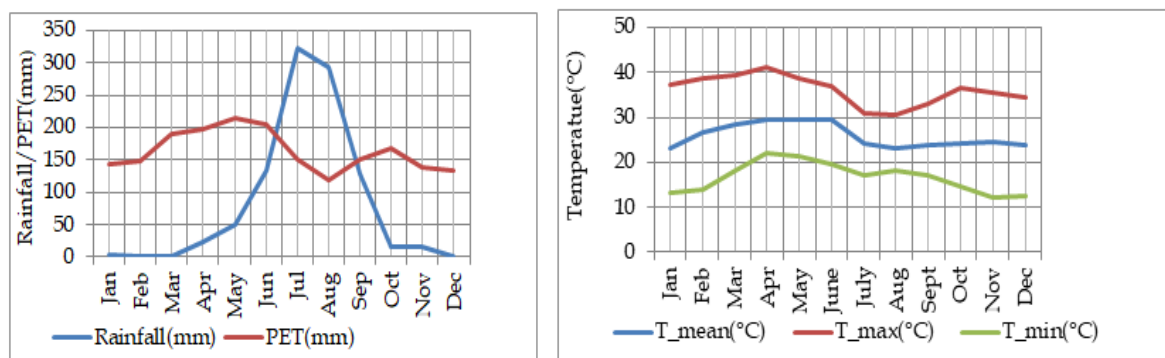


Fig. 1. Monthly mean rainfall, Potential Evapotranspiration (PET) and Temperature

Table 1. Treatment set-up

Treatment Code	Treatment Descriptions
T1	100% Crop evapotranspiration (ET_c) at all the growth stages
T2	50% ET_c at initial stage and full amount at other stages
T3	50% ET_c at development stage and full amount at other stages
T4	50% ET_c at mid stage and full amount at other stages
T5	50% ET_c at maturity stage and full amount at other stages
T6	25% ET_c at initial stage and full amount at other stages
T7	25% ET_c at development stage and full amount at other stages
T8	25 ET_c at mid stage and full amount at other stages
T9	25% ET_c at maturity stage and full amount at other stages

Full irrigation requirement (100% ET_c) denotes the amount of irrigation water equaling 1.0 times the crop water requirement (ET_c) whereas 50% ET_c and 25% ET_c means applying irrigation water 0.5 and 0.25 times of the full crop water requirement (ET_c) respectively

Table 2. Soil physical properties of the experimental site

Soil properties	Soil depth (cm)				Average
	0-25	25-50	50-75	75-100	
Particle size distribution					
- Sand (%)	60	56	54	56	56.5
- Clay (%)	16	18	18	18	17.5
-Silt (%)	24	26	28	26	26
-Textural Class	Sandy Loam	Sandy Loam	Sandy Loam	Sandy Loam	Sandy Loam
Bulk density (g/cm^3)	1.38	1.34	1.33	1.31	1.34
Field capacity (weight basis %)	30.3	37.8	38.9	38.6	36.4
Permanent wilting point (weight basis %)	24.8	22.2	25.3	29.8	25.53
Total available water (mm/m)					145.28

depths for each of the three soil profiles. Bulk density was determined by the core method [25] for each depth in the three profiles. "Soil water content was determined from soil samples taken at the same locations using the gravimetric method. Field capacity and permanent wilting points were considered at 0.3 and 15.0 bars, respectively" [26]. The soil basic infiltration rate was determined in the field using the double-ring infiltrometer method at two separate sites in the

experimental area, as described by [27] (Table 2).

2.5.3 Yield and yield components

Yield data were collected from three central furrows in a tomato planting plot. The number of fruits per plant and cluster number were determined using five plant samples from the three central rows. Yield and other yield

component parameters were collected, and the analysis was performed with Gen-Stat software.

2.5.4 Water-use efficiency (WUE)

The phrase water use efficiency refers to the link between growths; especially dry matter output and water use [1]. Water use efficiency (WUE) is defined as the yield per unit of water consumed by the plant. The total seasonal amount of water consumed by the crop per treatment was recorded, and crop water use efficiency (kgm^{-3}) for each treatment was computed by dividing marketable fruit output (kg) by total seasonal irrigation water consumption (m^3).

2.6 Data Analysis

An analysis of variance was performed following the standard procedures as explained in [28,29] using Gen Stat statistical software. Treatments showing significant differences were subjected to Duncan's multiple range test (DMRT) for mean separation at a 95% confidence level.

3. RESULTS AND DISCUSSION

3.1 Water Consumption and Irrigation Demand

A tomato-improved variety (Melkashola variety) was planted on December 9/2018 and December 12, 2019, off-seasons. Total precipitation during the months of December to May in both years was insignificant. As a result, throughout the growing period of the test crop, the only source of water was irrigation. The irrigation frequency was scheduled at four days for the initial and development growth stages and five and six days for the mid- and late-maturity growth stages,

respectively. Totally, 27 irrigation events were made during the crop-growing period (124 days). The amount of net applied irrigation water according to treatments is presented in Table 3.

Based on the CROPWAT 8 model output, the whole seasonal irrigation need in the area for tomato was found to be 678.13 mm (6781.3 m^3/ha) for the non-stressed condition, as shown in Table 3. Tomatoes require between 400 to 700 mm of seasonal crop water for optimum yields, depending on climate [30]. Table 3 shows the amount of water applied to water-stressed treatments and the water-savings as compared to the indicator treatment (100% crop evapotranspiration at all growth stages). The amount of water applied to non-stressed irrigation treatments (100% crop evapotranspiration at all growth stages) was agreed upon within the range of water requirements stated above.

3.2 Yield and Yield Parameters

3.2.1 Fruit length (FL) and fruit circumference (FC)

Combined statistical analysis over two years showed that changes in irrigation levels had a significant effect on the length and circumference of tomato plants ($P < 0.01$). However, as shown in Table 4, there were no significant effects among treatments in terms of days to 50% flowering, days to 50% fruiting, or number of fruits per plant. Minor changes in water deficit levels do not affect plant growth indices [31]. In this experiment, we found a strong relationship between yield traits (fruit length, fruit girth and market yield) and water use efficiency (Table 4).

Table 3. Total seasonal net irrigation depth applied to treatments

Treatment Combination	Net_depth_of irrigation (mm)	Water saving (m^3/ha)
100% Crop evaporation (ET_c) at all the growth stages (T1)	678.1	-
50% ET_c at initial stage and full amount at other stages (T2)	644.8	333.4
50% ET_c at development stage and full amount at other stages (T3)	601.0	770.9
50% ET_c at mid stage and full amount at other stages (T4)	536.4	1416.7
50% ET_c at maturity stage and full amount at other stages (T5)	592.7	854.2
25% ET_c at initial stage and full amount at other stages (T6)	628.1	500.0
25% ET_c at development stage and full amount at other stages (T7)	561.4	1166.7
25 % ET_c at mid stage and full amount at other stages (T8)	464.5	2135.5
25% ET_c at maturity stage and full amount at other stages (T9)	550.0	1281.3

Table 4. Analysis of variance on important agronomic parameters of Tomato

Source of Variation	50%DFI (days)	50%DFS (days)	FNPP (No.)	FL (cm)	FC (cm)	Myld (kg)	UnMyld (kg)	WUE (kg/m ³)
Treatments	NS	NS	NS	***	**	*	***	***

NS=Not significant; *, **, *** indicates significant at 0.05, <0.01 and <0.001 levels respectively; DFI, Days to flowering, DFS, Days to fruit setting, FL, Fruit length, FC, Fruit circumference, FNPP, fruit number per plant, Myld, Marketable yield, UnMyld, Unmarketable yield, WUE, Water use Efficiency

Table 5. Statistical comparison of the mean values of relevant parameters of Tomato

Trts	50%DFI (days)	50%DFS (days)	FNPP	FL (cm)	FC (cm)	Myld (Q/ha)	UnMyld (Q/ha)	WUE (kg/m ³)
T1	57.83 ^a	67.83 ^a	14.21 ^a	7.47 ^a	12.12 ^a	431.9 ^a	44.10 ^a	6.9 ^a
T2	54.83 ^a	67.17 ^a	15.42 ^a	5.61 ^{bcd}	10.59 ^{ab}	413.9 ^a	17.31 ^a	7.6 ^a
T3	57.17 ^a	68.00 ^a	14.10 ^a	4.65 ^d	8.48 ^c	394.1 ^a	16.53 ^a	7.8 ^a
T4	57.17 ^a	67.50 ^a	16.93 ^a	6.75 ^{ab}	11.53 ^a	419.1 ^a	18.0 ^a	9.01 ^a
T5	57.50 ^a	69.17 ^a	15.94 ^a	5.86 ^{bcd}	11.27 ^a	386.4 ^a	18.53 ^a	7.7 ^a
T6	59.17 ^a	65.60 ^a	14.01 ^a	6.07 ^{bc}	10.77 ^{ab}	386.1 ^a	14.48 ^a	7.3 ^a
T7	55.00 ^a	68.17 ^a	12.86 ^a	3.48 ^e	6.42 ^d	144.3 ^b	101.88 ^b	3.5 ^b
T8	56.17 ^a	67.33 ^a	13.82 ^a	5.09 ^{cd}	9.04 ^{bc}	365.2 ^a	17.92 ^a	9.1 ^a
T9	54.83 ^a	68.00 ^a	16.86 ^a	5.88 ^{bcd}	11.79 ^a	427.3 ^a	25.52 ^a	9.2 ^a
Mean	56.63	67.85	14.91	5.65	10.22	382.7	21.0	7.56
LSD	ns	ns	ns	1.136	1.756	142	32.11	3.82
C.V	6.3	4.6	39.2	17.1	14.6	32.7	30.50	30

Columns assigned with the same letter have not significant difference. Trts, Treatments, DFI, Days to flowering, DFS, Days to fruit setting, FL, Fruit length, FC, Fruit circumference, FNPP, Fruit number per plant, Myld, Marketable yield, UnMyld, Unmarketable yield, WUE, Water use Efficiency, LSD, least significance difference, C.V, Coefficient of variance

Treatments that irrigated with full amounts of irrigation water at all growth stages produced the longest fruit (7.47 cm) and largest fruit circumference (12.12 cm). The treatments that applied 25% of the full crop water demand/irrigation requirement at the development growth stage produced the shortest fruit length (3.48 cm) and fruit circumference (6.42 cm) (Table 5).

3.2.2 Marketable and unmarketable yields

Table 4 shows that different levels of irrigation in different stages of crop growth had a significant effect on salable tomato yield ($P < 0.5$). Non-marketable yield was also significantly affected ($P < 0.001$). As a result, the lowest marketable yield (1443 kg/ha) and the highest non-marketable yield (10188 kg/ha) were obtained in the treatment that was irrigated with 75% water less than the full irrigation requirement of the crop during the developmental growth stage (Table 5). Reducing the amount of full irrigation water required by 75% during the developmental growth stage reduces yield by 66.5% compared to full irrigation treatments in all growth stages. As shown in

Table 5, there is no statistically significant difference between the irrigated treatments at different levels of irrigation volume at different stages of growth, except for the reduction of up to 75% of water volume during development growth stages. The main findings are that the reduction of irrigation water up to 75% of the total irrigation requirement during the development phase leads to a significant yield reduction (66.5%) and high unmarketable yield. In contrast, we found that a 75% reduction in irrigation water at growth stages other than vegetative growth did not result in significant yield losses (Table 5).

3.3 Irrigation Water Savings

3.3.1 Water use efficiency (WUE)

Table 4 shows that the application of varied irrigation volumes at different growth stages resulted in a very significant difference at a 0.01 significance level. The highest and lowest water usage efficiency values were 9.2 kg/m³ and 3.5 kg/m³ obtained from plots that were irrigated with 25% ETc at maturity and development growth

stages, with the full amount at all other stages, respectively.

4. CONCLUSIONS

This study focused on comparing irrigation management options that can help save water and boost water use efficiency with no or minimal production loss in northern Ethiopia's semi-arid climate, notably in the study area-Laelay Koraro district, Tigray.

The results in this study confirmed that deficit irrigation at some tomato growth stages significantly influenced tomato yield, water use efficiency. The highest marketable yield was obtained from applying a full amount of irrigation at all growth stages of tomato and has not found significant difference compared to applying less water at any growth stages except the development growth stage. In this study, we have found that the developmental growth stage of tomato is the most sensitive growth stage to water stress. Reducing the amount of irrigation water required up to 75% of at developmental /vegetative stage can adversely affect marketable yields (by 66.5%) and water use efficiency. In terms of marketable yield and water use efficiency, we have not seen a significant difference among treatments except the 75% deficit irrigation applied at the development growth stage. Therefore, the results of this study verified that we can reduce the amount of irrigation water up to 75% of the full amount required at any growth stage, except the developmental growth stage, to save a substantial amount of water in the case of limited water availability conditions.

DISCLAIMER (ARTIFICIAL INTELLIGENCE)

Authors hereby declare that NO generative AI technologies such as Large Language Models (ChatGPT, COPILOT, etc) and text-to-image generators have been used during writing or editing of manuscripts.

ACKNOWLEDGMENTS

The authors would like to thank staff members of the Shire-Maitsebri Agricultural Research Center in general, and the Natural Resource Research Core Process in particular, for their assistance in conducting the study. Our special gratitude goes to the Tigray Agricultural Research Institute

(TARI) for providing financial support for the research project.

COMPETING INTERESTS

Author has declared that no competing interests exist.

REFERENCES

1. Nangare DD, Singh Y, Kumar PS, Minhas PS. Growth, fruit yield and quality of tomato (*Lycopersicon esculentum* Mill.) as affected by deficit irrigation regulated on phenological basis. *Agricultural Water Management*. 2016; 171:73-79.
2. Kuşçu H., Turhan A, & Demir AO. The response of processing tomato to deficit irrigation at various phenological stages in a sub-humid environment. *Agricultural Water Management*. 2014;133: 92-103.
3. Pereira LS., Oweis T. and Zairi A. Irrigation Management under Water Scarcity. *Agricultural Water Management*. 2002;57:175–206.
4. Lorite IL, Mateos L, Orgaz F, Fereres. Assessing deficit irrigation strategies at the level of an irrigation district. *Agricultural Water Management*. 2007;1-3(91):51-60.
5. Comas LH, Trout TJ, DeJonge KC, Zhang SM, Gleason. Water productivity under strategic growth stage-based deficit irrigation in maize. *Agricultural water management*. 2019;212:433-440.
6. Kirda C. Deficit Irrigation Scheduling Based on Plant Growth Stages Showing Water Stress Tolerance. *Water Reports*, (FAO). 2002;3–10.
7. Igbadun HE, Salim BA, Tarimo AK, Mahoo HF. Effects of deficit irrigation scheduling on yields and soil water balance of irrigated maize. *Irrigation Science*. 2008; 27:11-23.
8. Wang D. Water use efficiency and optimal supplemental irrigation in a high yield wheat field. *Field Crops Research*.2017;213:213-220.
9. M'hamed HC, Rezig M, Naceur MB. Water use efficiency of durum wheat (*Triticum durum* Desf) under deficit irrigation. *Journal of Agricultural Science*. 2015;8(7): 238.

10. Al-Barrak KM. Water use efficiency in wheat grown under drought conditions. 2006;408-411.
11. Istanbuluoglu A. Effects of irrigation regimes on yield and water productivity of safflower (*Carthamus tinctorius* L.) under mediterranean climatic conditions. *Agricultural Water Management*. 2009;96: 1792–1798.
12. Khapte PS, Kumar P, Burman U, Kumar P. Deficit irrigation in tomato: Agronomical and physio-biochemical implications. *Scientia horticulturae*. 2019; 248:256-264.
13. Sujatha G, Kanth BK, Sinha J, Kalyani MS, Lakshmi TV, Srinu M. Comparative Study of the Impact of Saline Water Irrigation on Tomato Yield, Quality and Growth in Andhra Pradesh, India. *International Journal of Plant & Soil Science*. 2023;35(20):1076-85. Available:<https://doi.org/10.9734/ijpss/2023/v35i203904>.
14. Fahim MM, Helal MG, Sultana T, Habib ZF, Husen MU, Halim A. Growth and Yield Performance of Tomato (*Lycopersicum esculentum* L.) at Different Building Heights of Rooftop Gardening. *International Journal of Environment and Climate Change*. 2023;13(8):1593-605. Available:<https://doi.org/10.9734/ijecc/2023/v13i82109>.
15. Zhang H, Xiong Y, Huang G, Xu X, Huang Q. Effects of water stress on processing tomatoes yield, quality and water use efficiency with plastic mulched drip irrigation in sandy soil of the Hetao Irrigation District. *Agricultural Water Management*. 2017;179: 205-214.
16. Al-Karaki GN. Growth, water use efficiency, and sodium and potassium acquisition by tomato cultivars grown under salt stress. *Journal of plant nutrition*. 2000;23(1):1-8.
17. Giuliani MM, Nardella E, Gagliardi A, Gatta G. Deficit irrigation and partial root-zone drying techniques in processing tomato cultivated under Mediterranean climate conditions. *Sustainability*. 2017; 12(9):2197.
18. Jiang X, Zhao Y, Tong L, Wang R, Zhao S. Quantitative analysis of tomato yield and comprehensive fruit quality in response to deficit irrigation at different growth stages. *HortScience*. 2019;54(8): 1409-1417
19. Mattar MA, Zin El-Abedin TK, Alazba AA, Al-Ghobari HM. Soil water status and growth of tomato with partial root-zone drying and deficit drip irrigation techniques. *Irrigation Science*.2020;38:163-176.
20. Girón A, Alcocer C, Espadas F, Talavera C, Estrella H, Chan A, Santamaria JM. Plant water relations. In *The papaya: botany, production and uses*. Wallingford UK: CABI. 2020;119-129.
21. Valiantzas JD. Simplified forms for the standardized FAO-56 Penman–Monteith reference evapotranspiration using limited weather data. *Journal of Hydrology*. 2013;505:13-23.
22. Allen RG. Smith M., Pereira LS. Raes D, Wright JL. Revised FAO procedures for calculating evapotranspiration: irrigation and drainage paper no. 56 with testing in Idaho. In *Watershed Management and Operations Management*. 2000;1-10.
23. Kroetsch D, Wang C. Particle size distribution. Soil sampling and methods of analysis. 2008;2:713-725.
24. Huluka G, Miller R. Particle size determination by hydrometer method. *Southern Cooperative Series Bulletin*.2014;419:180-184.
25. Blake GR. and Hartage KH. Methods of Soil Analysis:Bulck Density. 2nd ed. ed. Klute A. Madison Wisconsin USA: American society of agronomy Inc. and soil science society of America Inc. 1986;363-375.
26. Klute A. Water Retention: Laboratory Methods. In: *Methods of Soil Analysis*. In *Methods of Soil Analysis*, ed. A Klute. Madison, Wisconsin: Am. Soc. Agron. 1986;635–662.
27. Bouwer H. Methods of Soil Analysis: Intake Rate in Cylinder Infiltrometer. 2nd ed. ed. Klute A. Madison Wisconsin USA: American society of agronomy Inc. and soil science society of America Inc. 1986;825-843.
28. Bender FE. Statistical methods for food and agriculture. CRC Press; 2020.
29. Clewer AG, Scarisbrick D.H. Practical statistics and experimental design for plant and crop science, John Wiley & Sons.2023
30. Critchley W, Siegert K, Chapman C, Finkett M. Water harvesting: A manual for the design and construction of water

- harvesting schemes for plant production. Scientific Publishers.2013.
31. Rosadi RB. Afandi M. Senge Klto & Adomako JT. Critical water content and water stress coefficient of soybean (*Glycine max* [L.] Merr.) Under deficit irrigation. *Paddy and Water Environment*. 2005;3:219-223.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the publisher and/or the editor(s). This publisher and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

© Copyright (2024): Author(s). The licensee is the journal publisher. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/119376>