



Dielectric Properties of 1-ethyl-3-methyl-imidazolium Tetrafluoroborate (EMIM-BF₄) Using Cole-Cole Relaxation Model

T. J. Ikyumbur^{1*}, E. N. Asagha², E. C. Hemba¹ and J. A. Bash¹

¹Department of Physics, Federal College of Education, Pankshin, Plateau State, Nigeria.

²Department of Physics, Federal College of Education, Obudu, Cross River State, Nigeria.

Authors' contributions

This work was carried out in collaboration between all authors. Author TJI designed the study, performed the statistical analysis, wrote the protocol and wrote the first draft of the manuscript. Authors ENA and ECH managed the analyses of the study. Author JAB managed the literature searches. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/PSIJ/2017/31315

Editor(s):

- (1) Daniel Beysens, OPUR International Organization for Dew Utilization, France.
(2) Christian Brosseau, Distinguished Professor, Department of Physics, Université de Bretagne Occidentale, France.

Reviewers:

- (1) Sunipa Roy, Guru Nanak Institute of Technology, India.
(2) David Armando Contreras-Solorio, Autonomous University of Zacatecas, Mexico.
(3) S. Sreehari Sastry, Acharya Nagarjuna University, India.
(4) C. Nyamhere, Midlands State University, Zimbabwe.

Complete Peer review History: <http://www.sciencedomain.org/review-history/17901>

Original Research Article

Received 30th December 2016

Accepted 30th January 2017

Published 20th February 2017

ABSTRACT

The Cole-Cole relaxation equations were derived from the Debye equation. The dielectric constant ϵ' and loss factor ϵ'' of EMIM-BF₄ were fitted using the derived equations at temperature range of 5°C to 65°C and frequency range of 0.1GHz to 10GHz. The result obtained shows that the dielectric constant and loss factor of EMIM-BF₄ were higher at low frequency (i.e. $f = 0.1GHz$) and decrease as the frequency increases. The dielectric constant also increases with increase in the temperature except at 0.1GHz. At 15°C there was a sudden increase in the dielectric constant especially as the frequency increases beyond 5GHz. This sudden increase in the dielectric constant of EMIM-BF₄ may be due to the phase change of EMIM-BF₄. The loss factor of EMIM-BF₄ was generally small for all frequencies and temperatures. This may be due to the fact that EMIM-BF₄ consumed less energy when subjected to an applied field.

*Corresponding author: E-mail: ikyumburtj@yahoo.com;

Keywords: Cole-Cole; relaxation; dielectric constant; loss factor; EMIM-BF4.

1. INTRODUCTION

The last decade has witnessed an upsurge in research activities focusing on replacing the abundant used volatile organic solvents (VOC) with a more environmental friendly one. Several alternative methods have been developed and recently ionic liquids have emerged as “green” and environmental friendly solvents. Ionic liquids are a new class of purely ionic, salt-like materials that are liquid at ambient temperatures. In broad sense, this term includes all the molten salts, for instance, sodium chloride at temperatures higher than 800°C [1]. Today however, the term “ionic liquids” is used for the salts whose melting point is relatively low (below 100°C) [2]. A typical ionic liquid (IL) has a bulky organic cation (e.g N-alkylpyridinium, N-N-dialkylimidazolium) that is weakly coordinated to an organic and inorganic anions, such as BF_4^- , Cl^- , I^- , $CF_3SO_3^-$, and $AlCl_4^-$. The big difference in the size of a bulky cation and a small anion does not allow packing of lattice, which happens in many organic salts; instead, the anions are disorganized [3]. Ionic liquids have several advantages compared to commercial organic solvents or electrolyte liquids [4-5]. They are characterised by their non-combustible, non-flammable, display wide electrochemical windows, high inherent conductivity and lack of reactivity in various electrochemical or industrial applications etc. [6-10].

Because their properties, ionic liquids have attracted great attention in many fields, including organic chemistry, electrochemistry, physical chemistry, industrial physics and engineering generally. Today ionic liquids have been thought to be more safe electrolytes materials for electrochemical and energy storing devices, such as lithium batteries for cellular phones, batteries for vehicles, fuel cells, super capacitors, solar cells etc. [11-14].

Due to the special characteristics of ILs, such as wide electrochemical windows, high inherent conductivities, high thermal and electrochemical stability, tuneable physicochemical properties,

etc., they are potentially excellent candidates for environmentally sound, green electrolytes in batteries. In order to predict their success in a specific application, it is essential to gain information about their dielectric properties.

In this work, attempt have been made to study the dielectric properties of 1-Ethyl-3-methylimidazolium tetrafluoroborate (EMIM-BF4) because of its high ionic conductivity and low viscosity. Therefore, EMIM-BF4 is expected to be a good electrolyte candidate for lithium batteries when compared to organic solvent electrolytes and other ionic liquids.

2. MATHEMATICAL DERIVATION OF COLE-COLE EQUATIONS

The Debye equations can be expressed more concisely as

$$\varepsilon^* = \varepsilon_\infty + \frac{\varepsilon_s - \varepsilon_\infty}{1 + j\omega\tau} \quad (1)$$

But polar dielectrics that have more than one relaxation time do not satisfy Debye equations. An empirical equation for the complex dielectric constant has been suggested as:

$$\varepsilon^* = \varepsilon_\infty + \frac{\varepsilon_s - \varepsilon_\infty}{1 + (j\omega\tau_{c-c})^{1-\alpha}}; \quad 0 \leq \alpha \leq 1 \quad (2)$$

$\alpha = 0$ for Debye relaxation, τ_{c-c} is the mean relaxation time and α is a constant for a given material.

To determine the geometrical interpretation of equation (2), we substitute $1 - \alpha = n$ and rewrite it as

$$\varepsilon' - j\varepsilon'' = \varepsilon_\infty + \frac{\varepsilon_s - \varepsilon_\infty}{1 + (\omega\tau_{c-c})^n (\cos \frac{n\pi}{2} + j\sin \frac{n\pi}{2})}; \quad 0 \leq \alpha \leq 1 \quad (3)$$

Where $j^n = \cos \frac{n\pi}{2} + j\sin \frac{n\pi}{2}$ and $\varepsilon^* = \varepsilon' - j\varepsilon''$

Multiply equation (3) by $\frac{1 + ((\omega\tau_{c-c})^n (\cos \frac{n\pi}{2} - j\sin \frac{n\pi}{2}))}{1 + ((\omega\tau_{c-c})^n (\cos \frac{n\pi}{2} - j\sin \frac{n\pi}{2}))}$

$$\begin{aligned} \text{i.e } \varepsilon' - j\varepsilon'' &= \varepsilon_\infty + \frac{\varepsilon_s - \varepsilon_\infty}{1 + (\omega\tau_{c-c})^n (\cos \frac{n\pi}{2} + j\sin \frac{n\pi}{2})} \times \frac{1 + ((\omega\tau_{c-c})^n (\cos \frac{n\pi}{2} - j\sin \frac{n\pi}{2}))}{1 + ((\omega\tau_{c-c})^n (\cos \frac{n\pi}{2} - j\sin \frac{n\pi}{2}))} \\ \varepsilon' - j\varepsilon'' &= \varepsilon_\infty + \frac{\varepsilon_s - \varepsilon_\infty [1 + ((\omega\tau_{c-c})^n (\cos \frac{n\pi}{2} - j\sin \frac{n\pi}{2}))]}{1 + 2(\omega\tau_{c-c})^n \cos(\frac{n\pi}{2}) + (\omega\tau_{c-c})^{2n}} \end{aligned} \quad (4)$$

Equating the real and imaginary part, we have

$$\epsilon' = \epsilon_\infty + (\epsilon_s - \epsilon_\infty) \frac{1 + ((\omega\tau_{c-c})^n \cos(\frac{n\pi}{2}))}{1 + 2(\omega\tau_{c-c})^n \cos(\frac{n\pi}{2}) + (\omega\tau_{c-c})^{2n}} \quad (5)$$

$$-j\epsilon'' = \epsilon_s - \epsilon_\infty \frac{1 + ((\omega\tau_{c-c})^n (-j\sin\frac{n\pi}{2}))}{1 + 2(\omega\tau_{c-c})^n \cos(\frac{n\pi}{2}) + (\omega\tau_{c-c})^{2n}}$$

$$\therefore \epsilon'' = \epsilon_s - \epsilon_\infty \frac{1 + ((\omega\tau_{c-c})^n (\sin\frac{n\pi}{2}))}{1 + 2(\omega\tau_{c-c})^n \cos(\frac{n\pi}{2}) + (\omega\tau_{c-c})^{2n}} \quad (6)$$

3. METHODS

Equations (5) & (6) are called the real and imaginary parts of the Cole-Cole relaxation model. The real part (ϵ') represents the dielectric constant while the imaginary part (ϵ'') represents the loss factor. An algorithm was written using Maple-13 and the dielectric constant ϵ' and the loss factor ϵ'' of 1-ethyl-3-methylimidazolium

tetrafluoroborate [EMIM][BF₄] were generated (see Tables 1 and 2). The computations were done within frequency range of 0.1GHz to 10GHz and the temperatures between 5°C and 65°C. These frequency range were chosen because some polarization mechanisms such as atomic and electronic polarization contribution occur at higher frequencies more than megahertz range. The results generated in our computations are discussed below.

4. RESULTS AND DISCUSSION

The dielectric constant and the loss factor of ionic liquids were computed using Cole-Cole relaxation method. The dielectric constant ϵ' and the loss factor ϵ'' of EMIM-BF₄ were computed within the temperature range of 5°C to 65°C and the frequency of 0.1GHz to 10GHz. The results obtained in this work are shown in Tables 1 and 2 and are discussed based on the existing theories.

Table 1. The dielectric constant ϵ' and loss factor ϵ'' of ionic liquids (1-ethyl-3-methylimidazolium tetrafluoroborate) within the temperature range of 5°C and 35°C

F (GHz)	5°C		15°C		25°C		35°C	
	ϵ'	ϵ''	ϵ'	ϵ''	ϵ'	ϵ''	ϵ'	ϵ''
0.1	14.7932	0.0459	14.6717	0.0523	14.1658	0.0753	13.4608	0.0870
0.2	14.1668	0.0410	14.3346	0.0481	13.9239	0.0719	13.3343	0.0847
0.3	13.7120	0.0376	13.8837	0.0450	13.7136	0.0689	13.2141	0.0825
0.4	13.3457	0.0350	13.6012	0.0462	13.5236	0.0663	13.0989	0.0805
0.5	13.0409	0.0329	13.3575	0.0405	13.3487	0.0640	12.9879	0.0785
0.6	12.7752	0.0311	13.1419	0.0387	13.1859	0.0618	12.8806	0.0766
0.7	12.5404	0.0295	12.9479	0.0372	13.0331	0.0598	12.7767	0.0748
0.8	12.3297	0.0282	12.7712	0.0357	12.8890	0.0580	12.6759	0.0731
0.9	12.1387	0.0270	12.6088	0.0345	12.7523	0.0563	12.5780	0.0714
1.0	11.9635	0.0259	12.4584	0.0333	12.6223	0.0547	12.4827	0.0699
1.2	11.6524	0.0241	12.1868	0.0313	12.3794	0.0517	12.2998	0.0668
1.5	11.2490	0.0218	11.8361	0.0288	12.0510	0.0478	12.0423	0.0627
1.8	10.9291	0.0200	11.5357	0.0267	11.7571	0.0445	11.8027	0.0590
2.0	10.7356	0.0190	11.3570	0.0255	11.5771	0.0425	11.6518	0.0567
2.5	10.3210	0.0169	10.9675	0.0230	11.1723	0.0382	11.3017	0.0516
3.0	9.9791	0.0153	10.6400	0.0209	10.8197	0.0347	10.9855	0.0472
3.5	9.6894	0.0140	10.3581	0.0193	10.5082	0.0317	10.6980	0.0434
4.0	9.4390	0.0129	10.1112	0.0179	10.2301	0.0292	10.4352	0.0400
4.5	9.2191	0.0120	9.8920	0.0167	9.9794	0.0269	10.1938	0.0370
5.0	9.0237	0.0112	9.6954	0.0156	9.7519	0.0250	9.9712	0.0344
5.5	8.8482	0.0105	9.5174	0.0147	9.5440	0.0233	9.7652	0.0320
6.0	8.6893	0.0099	9.3551	0.0139	9.3532	0.0218	9.5739	0.0299
6.5	8.5445	0.0093	9.6062	0.0132	9.1771	0.0205	9.3956	0.0280
7.0	8.4115	0.0089	9.0688	0.0125	9.0139	0.0192	9.2292	0.0263
7.5	8.2889	0.0084	8.9414	0.0120	8.8622	0.0181	9.0734	0.0247
8.0	8.1753	0.0081	8.8229	0.0114	8.7207	0.0172	8.9272	0.0233
8.5	8.0696	0.0077	8.7121	0.0109	8.5882	0.0162	8.7896	0.0220
9.0	7.9709	0.0074	8.6083	0.0105	8.4639	0.0154	8.6600	0.0208
9.5	7.8784	0.0071	8.5107	0.0100	8.3470	0.0147	8.5377	0.0197
10.0	7.7915	0.0068	8.4186	0.0097	8.2368	0.0140	8.4219	0.0187

Table 2. The dielectric constant ϵ' and loss factor ϵ'' of ionic liquids (1-ethyl-3-methylimidazolium tetrafluoroborate) within the temperature range of 45°C and 65°C

F(GHz)	45°C		55°C		65°C	
	ϵ'	ϵ''	ϵ'	ϵ''	ϵ'	ϵ''
0.1	12.8747	0.0765	12.5661	0.1020	12.0899	0.1191
0.2	12.7733	0.0748	12.5278	0.1011	12.0756	0.1186
0.3	12.6805	0.0732	12.4880	0.1002	12.0590	0.1182
0.4	12.5935	0.0718	12.4472	0.0993	12.0409	0.1177
0.5	12.5109	0.0705	12.4058	0.0984	12.0216	0.1171
0.6	12.4319	0.0692	12.3640	0.0975	12.0012	0.1165
0.7	12.3559	0.0680	12.3220	0.0965	11.9799	0.1159
0.8	12.2826	0.0667	12.2798	0.0956	11.9580	0.1153
0.9	12.2117	0.0658	12.2375	0.0946	11.9353	0.1147
1.0	12.1429	0.0647	12.1951	0.0937	11.9120	0.1140
1.2	12.0111	0.0627	12.1105	0.0919	11.8640	0.1127
1.5	11.8259	0.0599	11.9843	0.0892	11.7890	0.1106
1.8	11.6531	0.0574	11.8595	0.0865	11.7110	0.1084
2.0	11.5440	0.0559	11.7772	0.0848	11.6579	0.1070
2.5	11.2894	0.0522	11.5755	0.0806	11.5218	0.1033
3.0	11.0567	0.0490	11.3799	0.0767	11.3830	0.0996
3.5	10.8426	0.0462	11.1908	0.0730	11.2427	0.0960
4.0	10.6442	0.0436	11.0083	0.0695	11.1021	0.0924
4.5	10.4595	0.0413	10.8323	0.0662	10.9620	0.0889
5.0	10.2869	0.0392	10.6629	0.0632	10.8229	0.0855
5.5	10.1250	0.0373	10.4997	0.0603	10.6854	0.0822
6.0	9.9727	0.0356	10.3426	0.0575	10.5498	0.0790
6.5	9.8290	0.0339	10.1913	0.0550	10.4164	0.0759
7.0	9.6931	0.0324	10.0457	0.0525	10.2855	0.0729
7.5	9.5643	0.0310	9.9055	0.0503	10.1571	0.0701
8.0	9.4420	0.0298	9.7705	0.0481	10.0324	0.0673
8.5	9.3257	0.0286	9.6404	0.0461	9.9085	0.0647
9.0	9.2149	0.0274	9.5150	0.0442	9.7884	0.0622
9.5	9.1091	0.0264	9.3941	0.0424	9.6712	0.0598
10.0	9.0080	0.0254	9.2776	0.0407	9.5568	0.0575

5. DIELECTRIC CONSTANT

The effect of frequency for the dielectric constant of EMIM-BF₄ for different temperatures is shown graphically below.

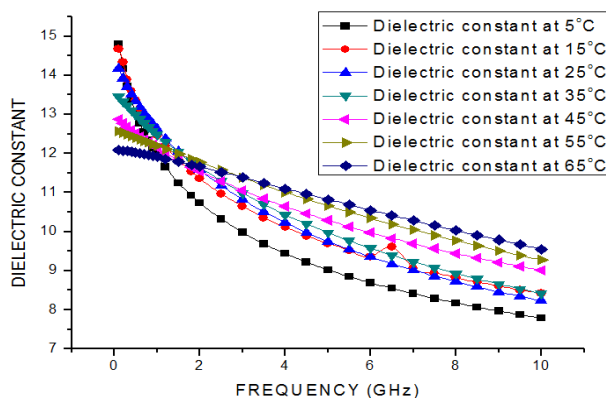


Fig. 1. The graph of dielectric constant against the frequency. The dielectric constant of EMIM-BF₄ decrease when the temperature increased beyond 0.1GHz (i.e. 14.733 to 12.090 for 5°C and 65°C respectively). However, as the frequency increase beyond 0.1GHz the dielectric constant increases when the temperature increases (see Fig.1 above)

The dielectric constant ϵ' and loss factor of EMIM-BF₄ has been studied using Cole-Cole relaxation model. The results revealed that at frequency 0.1GHz the dielectric constant decrease when the temperature increases. This decrease in the dielectric constant as a result of the increase in the temperature at that particular frequency may be due to the relaxation time which has been found to be fast at high temperature and increases dramatically at low temperatures, suggesting a freezing of electric dipole at low temperature [15-17].

The dielectric constant of EMIM-BF₄ was also high at lower frequencies. The higher value of dielectric constant ϵ' at low frequency may be due to the effect of ionic conductivity which is inversely proportional to frequency or maybe because of the overall conductivity which consists of different conduction mechanisms. The most prevalent one in moist materials is the ionic conductivity [16].

The graph of dielectric constant against frequency in gigahertz (GHz) at various temperatures revealed that the dielectric constant ϵ' of EMIM-BF₄ has high values at low frequency then decreased sharply when the frequency increases. The decrease of dielectric constant at higher frequency range for EMIM-BF₄ may be due to the fact that the dipole cannot follow up the applied field. The higher values of dielectric constant ϵ' and loss factor ϵ'' at lower frequencies may be due to the contribution from all the four types of polarization (i.e the space charge, dipole, ionic and electronic polarization) [18]. It is observed that at higher frequencies, only the ionic and electronic polarizations contribute. The decrease in the dielectric constant and loss factor as the result of increase in the frequency may also means that the response of the permanent dipole decreases as the frequency increases and the contribution of the charge carriers (ions) to the dielectric constant decreases [16,19]. It is also observed that at temperature 15°C and between the frequencies range 5GHz to 7GHz there was a sudden increment in the dielectric constant of EMIM-BF₄ (see Fig. 1). This sudden increase in the dielectric constant of EMIM-BF₄ at that particular temperature may be due to a phase change of EMIM-BF₄ [20]. This is because the dielectric constant strongly dependent on the structure of materials [21].

6. CONCLUSION

The Cole-Cole equation and its derivatives have been used to compute the dielectric constant and loss factor of EMIM-BF₄. The dielectric constant and loss factor of EMIM-BF₄ was higher at lower frequencies and decrease as the frequency increases. The dielectric constant however, increases when the temperature increases, for all frequencies except those at 0.1 GHz (see Tables 1 and 2).

The loss factor of EMIM-BF₄ was relatively small for all temperatures studied in this work. This implies that the imaginary part of EMIM-BF₄ does not absorb too much heat from alternating field (see Tables 1 and 2).

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Laus G, Bentivoglio G, Schottenberger H, Kahlenberg V, Kopacka H, Roder T, Sixta H. Ionic liquids: Current developments, potential and drawbacks for industrial applications. *Journal Lenzing Berichte*. 2005;84:71-85.
2. Hagiwara R, Ito Y. Room temperature ionic liquids of alkylimidazolium cations and fluoroanions. *Journal of Fluorine Chem*. 2000;105(2):221-227.
3. Seddon KR. Room temperature ionic liquids: Neoteric solvents for clean catalysis. *Journal of Kinetics and Catalysis*. 1996;37(5):693-697.
4. Mutelet F, Jaubert JN. Accurate measurements of thermodynamics properties of solutes in ionic liquids using gas Chromatography. *Journal of Chromatography*. 2006;1(2):256-267; A1102.
5. Plechkova NV, Seddon KR. Applications of ionic liquids in the chemical industry. *Chemical Society Reviews*. 2008;37(1): 123-150;0306-0012.
6. Mastumoto H, Sakaebe H, Tatsumi K. Preparation of room temperature ionic liquids based on aliphatic onium cations and asymmetric amide anions and their electrochemical properties as a lithium battery electrolyte. *Journal of Power Sources*. 2005;146;1(2):45-50;0378-7753.

7. Saruwatari H, Kuboki T, Kishi T, Mikoshiba S, Takami N. Imidazolium Ionic liquids containing LiBOB electrolyte for lithium battery. *Journal of Power Sources*. 2010;195(5):1495-1499;0378-7753.
8. Giroud NM, Rouault H, Chainet E, Poignet JC. Ionic liquids based electrolytes for lithium ion battery. *ECS Meeting Abstracts*. 2008;802(3044):1091-8213.
9. Stracke MP, Migliorini MV, Lissner E, Schrekker HS, Dupont J, Goncalves RS. Imidazolium ionic liquids as electrolytes for manganese dioxide free Leclanche batteries. *Applied Energy*. 2009;86(9):1512-1516;0306-2619.
10. Seddon KR. Ionic liquids: A taste of the future. *Nature Materials*. 2003;2(6):363-365;1476-1122.
11. Sakaebe H, Matsumoto H, Tatsumi K. Application of room temperature ionic liquids to Li batteries. *Electrochimica Acta*. 2007;53(3):1048-1058;0013-4686.
12. Ohno H. *Electrochemical aspects of Ionic liquids*, 2nd Ed., John Wiley and Sons, Inc. Hoboken, New Jersey, USA; 2005. ISBN:978-0-471-64851-2
13. Sato T, Masuda G, Takagi K. Electrochemical properties of novel ionic liquids for electric double layer capacitor applications. *Electrochimica Acta*. 2004;49:21:3603-3611.
14. Stathatos E, Lianos P, Jovanovski V, Orel B. Dye-sensitized photoelectrochemical solar cells based on nano-composite organic-ionorganic materials. *Journal of Photochemistry and Photobiology A: Chemistry*. 2005;169(1):57-61.
15. Ahmad MM, Yamada K. Superionic $PbSnF_4$: A giant dielectric constant material. *Appl. Phys. Lett.* 2007;19(5):052912-3.
16. Onimisi MY, Ikyumbur TJ, Abdu SG, Hembra EC. Frequency and temperature effect on dielectric properties of acetone and dimethylformamide. *Physical Science International Journal*. 2016b;11(4):1-8;2348-0130.
17. Graca M, Valente MA, Ferreira da Silva MG. Electrical properties of lithium nobium silicate glasses. *J. Non-Cryst. Solids*. 2003;325(1-3):267-274.
18. Salman F, Khalil R, Hazaa H. Dielectric studies and Cole-Cole plot analysis of silver-ion conduction glasses. *Adv. J. Phys. Sc.* 2014;3(1):1-9.
19. Bergo P, Pontuschka WM, Prisen JM. Dielectric properties of $P_2O_5 - Na_2O - Li_2O$ glasses containing WO_3 , C_6O or Fe_2O_3 . *Solid state communications*. 2007;141(10):545-547.
20. Onimisi MY, Ikyumbur TJ. Dielectric study of pure propan-1-ol and propan-2-ol using Debye Relaxation Model. *American Chemical Science Journal*. 2016a;10(1):1-12.
21. Agilent. *Basics of Measuring the Dielectric Properties*; 2006. Available:<http://www3.imperial.ac.uk/pls/portallive/docs/1/11949698.PDF>

© 2017 Ikyumbur et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
The peer review history for this paper can be accessed here:
<http://sciencedomain.org/review-history/17901>